

FUME ABSORBER


TOKii-2DFAD

TOKii



- Clean air at your shop Floor with high quality Filters Layer
- For Lead and Lead free
- Air flow is adjustable.
- Maintenance free Brush less motor.
- Three stage Filter including HEPA for air pollution like smoke, peculiar smell, dust, poisonous and harmful gas, during the process of soldering, laser marking & carving, printing, and medical care, etc.
- Time setting function to set time for auto shut off
- Locking function of control Panel.
- Remote control for easy operations
- Filter choke Indication
- Preprogram timer to switch off after define time.

CONTROL PANEL

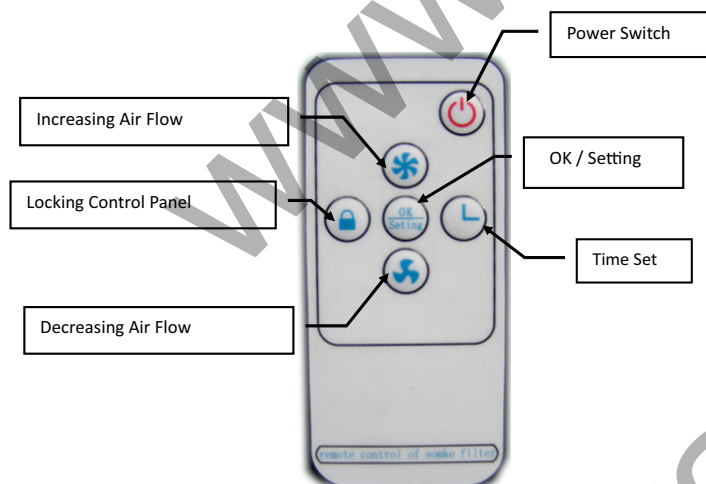

CONTROL PANEL



Meets indoor air quality standard. CE and PONY certified, safe and reliable. Designed according to standards: Indoor Air Quality Standard,

Specifications

- Air Inlet Interface Dia. 50mm X 2 Flange Flexible self-standing arrangement.
- (No additional clamp required)
- Input Voltage AC220V
- Maximum Power 210W (Power Suction)
- Air Velocity 2×17 m/s
- Filtering Efficiency $0.3\mu\text{m}$, 99.97%
- Noise Level $< 55\text{dB}$
- Maximum Turbine Vacuum 3000 Pascal
- Filter Surface Area $5 \times 16.5 \times 344 = 28380$ sq. cm
- (2.838 m sq.)
- Length of Duct 1.2M, Diameter ≤ 130 mm and Duct dia $\geq 50\text{mm}$
- Systemic Flow 2×165 Cubic M / H
- Dimensions of Main Unit in mm L425×W240×H410
- Weight (Excluding the duct) 14kg
- Consist of 5 pre filter, main machine with Filter, 2 Nos. Duct, Remote, Manual