

## TOKii-90DHM DE-HUMIDIFIER



### Specifications

- De-humidification capacity: 90L/day
- Voltage: 220V-240V/50HZ
- Application area: 90-120 square meters
- Power supply: 1.32 KW
- Operating temperature: 5-38°C
- Control mode: fully automatic control
- Drainage method: hose drainage
- Humidity control range: 35% -90% RH
- Air inlet filtration device: primary filtration
- Weight: 42 kilograms
- Machine size: 460X360X845mm


## TOKii-150DHM DE-HUMIDIFIER



### Specifications

- De-humidification capacity: 150L/day
- Nominal Dehumidifying Capacity: 2.72KG/H , 27°C 70%RH
- Maximum Dehumidifying Capacity: 150L/D
- Power: 220V/ 50HZ
- Rated power: 1495W
- Maximum power: 2300W
- Rated Current: 6.9A
- Maximum current: 10.5A
- Refrigerant charge: R22/1100g
- Body size: W545\* D440 \* H990mm
- Applicable temperature range: 5-38°C
- Weight(KG): 60KGS

## TOKii-240DHM DE-HUMIDIFIER

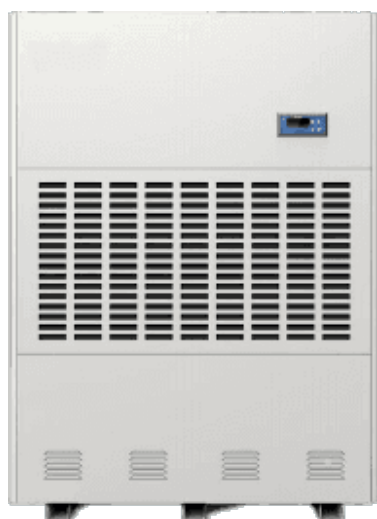

### Specifications

- Dehumidifier
- Power supply: 220V/50HZ
- Dehumidifying capacity: 240L/day
- Maximum input power: 4.9KW
- Using area: 200-350 square meters
- Temperature: 5-38 °C
- Circulating air volume: 2800m<sup>3</sup>/h
- Refrigerant/ Injection: R22/1200g
- Humidity control range: 10%-95%RH
- Humidity control accuracy: ±3 %
- Machine Weight: 140 kgs
- Machine Size: 780x470x1720mm