


# DIGITAL TORQUE METER

**TOKii**



**TOKii-DTM-10**

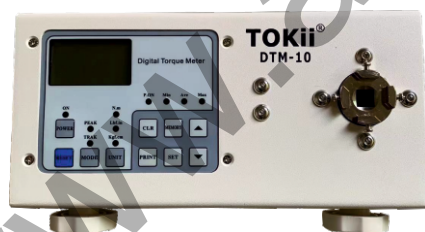

**TOKii-DTM-100**  
**TOKii-DTM-200**



**JOINT**



**TOKii-DTM-SJ**  
**( STANDARD )**

**OPTIONAL**  
**TOKii-DTM-SJ1.5**

## • FEATURE

- Torsion direction display.
- Automatic alarm Settings.
- Can be stored and print 10 test data.
- Calculating the average store data automatically.
- Can print the test curve.
- Various unit measurement in Kgf-cm, Lbf- in, N.m transformation. With a peak value holding function.
- Nickel metal hydride battery display.
- 1 to 60 minutes of adjustable without automatic shutdown operation designed to save power.
- Automatic charge control.
- Light touch keys to operation.
- Battery life 500 times

| Parameters                                      | TOKii-DTM10                              | TOKii-DTM100 | TOKii-DTM200 | TOKii-DTM500 |
|-------------------------------------------------|------------------------------------------|--------------|--------------|--------------|
| N-M<br>kgf-cm                                   | Range                                    |              |              |              |
|                                                 | 0.004~1.000                              | 0.04~10.00   | 0.1~20       | 0.2~50       |
|                                                 | 0.05~10                                  | 0.5~100      | 1-200        | 2-500        |
| Precision                                       | Within $\pm 0.5\%$                       |              |              |              |
| Sampling rate                                   | 600HZ                                    |              |              |              |
| Power source                                    | lithium battery                          |              |              |              |
| Charging time                                   | The < 8 hours                            |              |              |              |
| When charged continuous use time of the battery | 50 hours                                 |              |              |              |
| The life of the battery                         | Back to 1000 or higher                   |              |              |              |
| Size                                            | 120mm×230mm×651mm                        |              |              |              |
| Weight                                          | 2 kg                                     |              |              |              |
| The charger                                     | Input: AC 50HZ 220V output: DC 15V 300mA |              |              |              |