

SCREWDRIVERS

TOKii®


TOKii-SDAS Series ESD Screwdriver with Signal



Specification

- ESD Brushless Electric Screwdriver
- Input voltage: 230 Tool, work on 30 Volt DC
- Ergonomic ESD Grip
- Contact less Switch for longer life.
- Torque adjustment: step less
- Signal Outputs for Automation
- Optional TOKii-04SC-SDAS series Counter applicable for Mistake proof Assembly.


Model No	Torque Range Kg/cm	RPM	Input voltage Output Voltage Power	Bit shank Type	Accuracy	Weight
TOKii-SDAS057S5	0.5-7	1000	230 V / 30 V / 90 watt	5mm Round	± 3%	340 gm
TOKii-SDAS320SB	3-20	1000	230 V / 30 V / 108 watt	6.35 mm Hex	± 3%	490 gm
TOKii-SDAS525SB	5-25	1000	230 V / 30 V / 108 watt	6.35 mm Hex	± 3%	490 gm
TOKii-SDAS2060SB	20-60	640	230 V / 30 V / 180 watt	6.35 mm Hex	± 4%	740 gm
TOKii-SDAS3080SB	30-80	640	230 V / 30 V / 180 watt	6.35 mm Hex	± 4%	740 gm

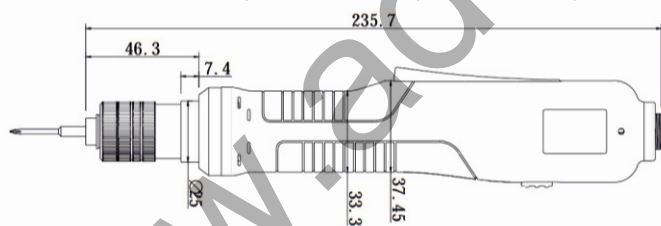

TOKii-SDAS057S5



TOKii-SDAS320SB
TOKii-SDAS525SB

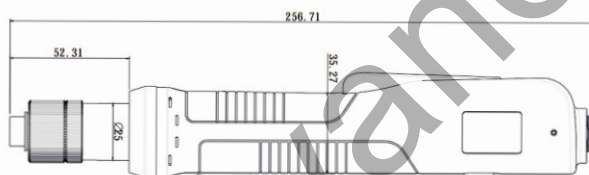

TOKii-SDAS2060SB
TOKii-SDAS3080SB