


OPTICAL INSPECTION

STEREO[®] MICROSCOPE

TOKii-SM0745

TOKii

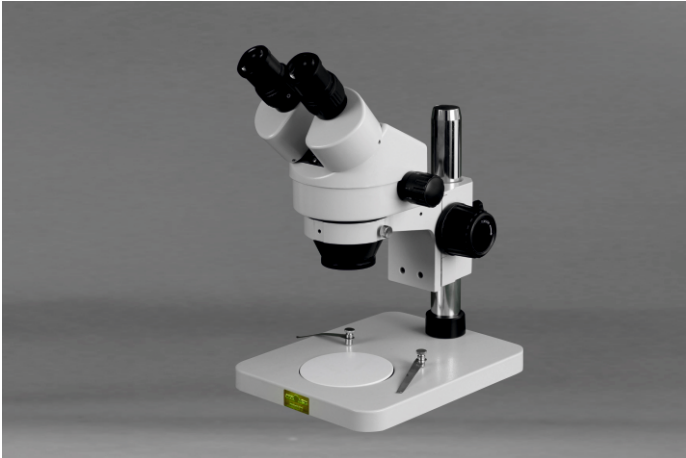

OPTIONAL LIGHT

FEATURES

- Binocular observation and digital observation synchronization without interference without switching
- High quality optical system.
- Each mirror is coated with a special layer of optical components, the achievement of a flat image and Good contrast of the positive, especially in the field of vision in the vicinity of the image is more clear and bright.
- Greater magnification.
- Using the continuous zoom lens 0.7x~4.5x (zoom 6.4:1), standard magnification 7x~45x.
- Magnification can be extended to 3.5x~180x.
- Long effective working distance. Standard working distance of 100mm, with auxiliary objective, the working distance will be extended to 30mm~165mm.
- Create enough space for a variety of applications and work situations.
- Ergonomic design.
- 10 observation of the first 45 degrees tilt, rotation of 360 degrees, the best focus brightness, No Fatigue when use for long time.
- 11 binocular vision can be adjusted to ensure that users of different vision can get a clear and satisfactory image.
- 12 variable hand wheel level (axial) bilateral set, easy to operate and comfortable, variable repeat high precision.
- Standard configuration: 7x~45x optional magnification eyepiece and auxiliary lens can be extended to 3.5x~180x, zoom
- Standard configuration: 7x~45x lens zoom lens zoom ratio 6.4:1 to ensure that the image plane parfocal
- Observation of the first 45 degree tilt, 360 degree tilt, interpapillary distance 54~76mm, bilateral diopter adjustment (+ 6)
- Hinge type binocular or three mesh, splitting ratio 20%/ 80%
- Standard configuration: 10x20mm, wide field eyepiece, wide angle, high starting point, EYE light, to provide convenience for wearing glasses observer
- Optional 15X/15mm, 20X/10mm, 10X/20mm eyepiece, (both with micrometer)
- Working distance standard configuration: 100mm (effective distance) optional auxiliary lens can be extended to 30mm~165mm
- Auxiliary lens optional 0.5X/165mm, 1.5X/45mm, 2X/30mm
- The focusing mechanism can adjust the hand wheel and the lifting range is 50mm